


TRANSFORMER

TR40VA015

Transformer 40 VA, 240/208/120 to 24 Vac, Foot and Single Threaded Hub Mount

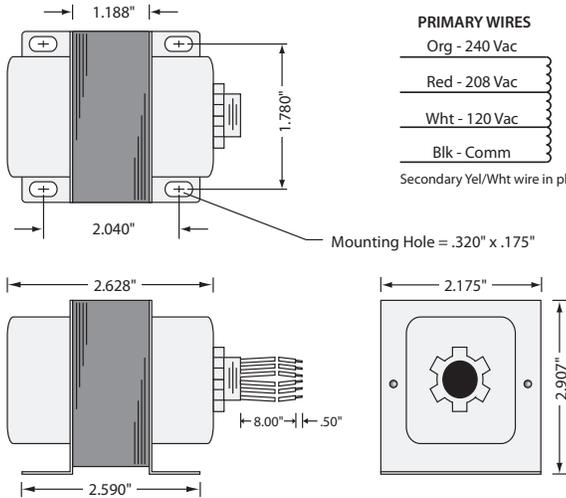

PRIMARY WIRES	SECONDARY WIRES
Org - 240 Vac	Yel/Wht - 24 Vac
Red - 208 Vac	
Wht - 120 Vac	
Blk - Comm	Yel - Comm

Secondary Yel/Wht wire in phase with Primary Blk wire.



SPECIFICATIONS

- VA Rating:** 40VA
- Frequency:** 50/60 Hz
- Mounting:** Foot & Single Threaded Hub
TRMP44K0 Mounting Plate Provided
- Over Current Protection:** Thermal Fuse (Fuse not field replaceable)
- Dimensions:** 2.628" x 2.175" x 2.907" (w/ .500" NPT Hub)
- Wire Length:** 8" Typical w/ .5" Strip
- Operating Temperature:** -30 to 140° F
 - MTBF: 100,000 Hours @ 77° F
- Construction:** Split-Bobbin
- Weight:** 2.20 lbs.
- Approvals:** Class 2 UL5085-3 Listed, C-UL, CE, RoHS

TRANSFORMERS