




AC POWER SUPPLY: 120 VAC TO 24 VAC

PSB40AB10



Panel Mount 40 VA Power Supply, 120 to 24 Vac

PSB100AB10

Panel Mount 100 VA Power Supply, 120 to 24 Vac



* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.

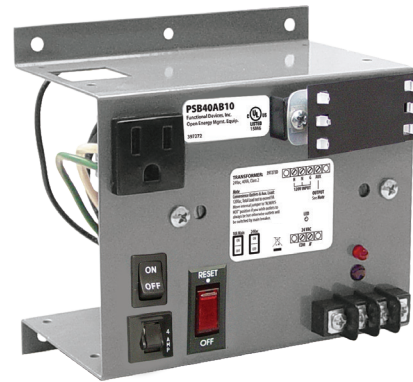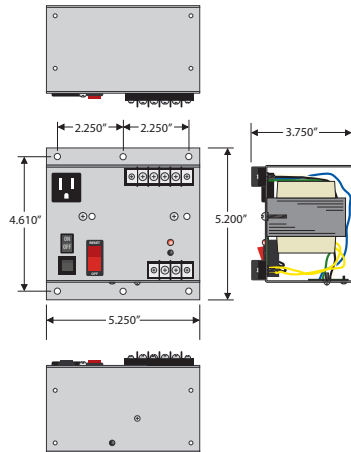

REMOVABLE TERMINAL COVER PROVIDED

**POWER
SUPPLIES**

SPECIFICATIONS

Transformer: One 40 VA Split-Bobbin (PSB40AB10)
One 100 VA Split-Bobbin (PSB100AB10)

Primary: 120 Vac

Secondary: 24 Vac, w/ LED Indicator

Frequency: 50/60 Hz

Over Current Protection: Inherently Limited + Circuit Breaker (PSB40AB10)
Circuit Breaker (PSB100AB10)

24 Vac ON/OFF: On / Off Switch

Main Breaker ON/OFF: Switch / Breaker (10 Amp)
(Kills power to entire unit:
Outlets, Aux. Output, & Transformer)*
Total Combined Output 9A

Mounting: Panel mount

Temperature: 40° C

Approvals: Class 2 (UL Approved
UL5085-3), UL916, UL508 for -IC
models, C-UL

Dimensions: 5.200" x 5.250" x 3.750"

Weight: 2.18 lbs. (PSB40AB10)
3.58 lbs. (PSB100AB10)

Notes:

- To order UL508, add "-IC" to end of model number.