


**AC POWER SUPPLY**

**PSC40AB10**


Enclosed Single 40 VA Power Supply, 120 to 24 Vac

**PSC100AB10**

Enclosed Single 100 VA Power Supply, 120 to 24 Vac



\* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.

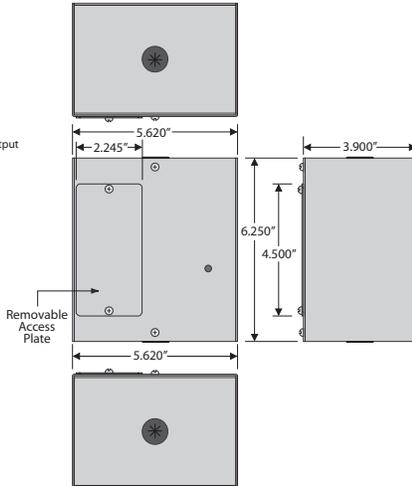

Shown Without Cover



Shown With Cover



POWER SUPPLIES

**SPECIFICATIONS**

- Transformer:** One 40 VA Split-Bobbin, Inherently Limited (PSC40AB10)  
One 100 VA Split-Bobbin, Circuit Breaker (PSC100AB10)
- Primary:** 120 Vac
- Secondary:** 24 Vac, w/ LED Indicator
- Frequency:** 50/60 Hz
- 24 Vac ON/OFF:** On / Off Switch & Breaker

- Main Breaker ON/OFF:** Switch / Breaker (10 Amp) (Kills power to entire unit: Outlets, Aux. Output, & Transformer)\*  
Total Combined Output 9A
- Mounting:** Mounting plate included (as shown)
- Temperature:** 40° C
- Approvals:** Class 2 (UL Approved UL5085-3), UL916, UL508 for -IC models, C-UL
- Dimensions:** 6.250" x 5.620" x 4.250"
- Weight:** 4.40 lbs. (PSC40AB10), 5.80 lbs. (PSC100AB10)

- Notes:**
- To order without enclosure, see PSB40AB10 & PSB100AB10.
  - To order UL508, add "-IC" to end of model number.