




DC POWER SUPPLY: 120 VAC OR 24 VAC TO 1.5 - 28 VDC



PSM24A24DAS

4.00" & 2.75" Track Mount Isolated Linear DC Power Supply, **24 Vac** to 1.5-28 Vdc, 300 mA Adjustable Output

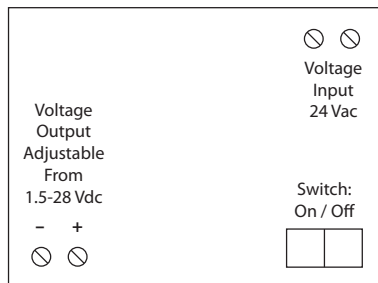

PSM19A24DAS

4.00" & 2.75" Track Mount Isolated Linear DC Power Supply, **120 Vac** to 1.5-28 Vdc, 300 mA Adjustable Output

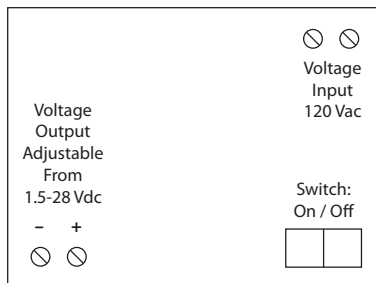

SPECIFICATIONS

Voltage Input: 24 Vac (PSM24A24DAS)
120 Vac (PSM19A24DAS)

Voltage Output: 1.5 - 28 Vdc Isolated

Frequency: 50/60 Hz

Overload Protection: Electrical and Thermal, Auto-Reset

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Power Status: LED On = Activated

Dimensions: 1.625" x 2.750" x 4.000"

Track Mount: 4.000" and 2.750"
MT212-4 Mounting Track Supplied

Weight: 1.10 lbs.

ON/OFF Switch: 2 Position

Approvals: UL916, C-UL

Output Current Ratings:

116 mA @ 10 Vdc

125 mA @ 12 Vdc

300 mA @ 24 Vdc

Input Current Rating:

950 mA Maximum (PSM24A24DAS)

150 mA Maximum (PSM19A24DAS)

Percent Ripple:

0.0016%, 24 Vdc @ 300 mA

Regulation:

Load: 0.04% No Load to Full Load

Line: 0.0080 mV/V (PSM24A24DAS)

Line: 0.6250 mV/V (PSM19A24DAS)