


15 AMP TRACK MOUNT CONTROL RELAYS


RIBMN12C

2.75" Track Mount Relay 15 Amp SPDT with
12 Vac/dc Coil

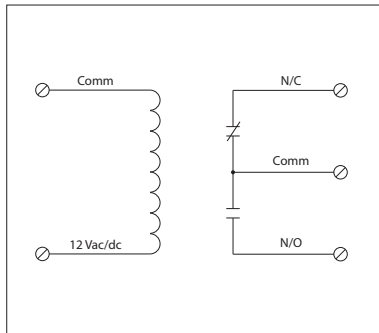

RIBMN12S

2.75" Track Mount Relay 15 Amp SPST
+ Override with 12 Vac/dc Coil

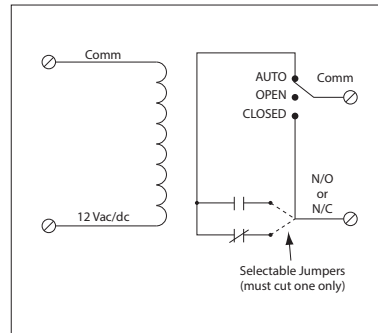

Cut
for
N/O

Cut
for
N/C

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil (RIBMN12C)
One (1) SPST Continuous Duty Coil (RIBMN12S)

Expected Relay Life: 10 million cycles minimum mechanical

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Operate Time: 6ms

Relay Status: LED On = Activated

Dimensions: 1.100" x 2.750" x 1.750" (RIBMN12C)
1.250" x 2.750" x 1.750" (RIBMN12S)

Track Mount: 2.750", See MT212 Series on page 152
MT212 Mounting Track Sold Separately

Approvals: UL Listed, UL916, UL864, C-UL
California State Fire Marshal

Gold Flash: No

Override Switch: No (RIBMN12C)
Yes (RIBMN12S)

Contact Ratings:
15 Amp General Use @ 125 Vac
10 Amp General Use @ 277 Vac
10 Amp Resistive @ 30 Vdc (N/O)
7 Amp Resistive @ 30 Vdc (N/C)
1/2 HP @ 125 Vac
1 HP @ 250 Vac
1/4 HP @ 277 Vac
C300 Pilot Duty

Coil Current:
53 mA @ 10 Vac
62 mA @ 12 Vac
29 mA @ 11 Vdc
35 mA @ 12 Vdc

Coil Voltage Input:
12 Vac/dc ; 50-60 Hz
Drop Out = 2 Vac / 2.5 Vdc
Pull In = 9 Vac / 11 Vdc

Notes:
• Must cut appropriate jumper to select Normally Open or Normally Closed (RIBMN12S)