PG/PV/PGE/PVE





NOTICE

- This product is not intended for life or safety applications.
- Do not install this product in hazardous or classified locations.
- Read and understand the instructions before installing
- Turn off all power supplying equipment before working on it.
- The installer is responsible for conformance to all applicable codes.

PRODUCT IDENTIFICATION				
Туре	Range	Wetted Material	Output	
PG 🔲	\Box	A	口	
Blank = Deluxe E = Economy	03 = 0 to 15 psig (Deluxe only) 04 = 0 to 25 psig 05 = 0 to 50 psig 06 = 0 to 75 psig 07 = 0 to 100 psig 08 = 0 to 250 psig 09 = 0 to 500 psig 10 = 0 to 1000 psig 11 = 0 to 5000 psig 12 = 0 to 10000 psig	= 316L stainless steel	B = 1-5VDC (economy only) M = 4-20mA V = 0-10VDC (deluxe only) J = 0-5VDC (deluxe only)	
Туре	Range	Wetted Material	Output	
PV _	П	A	口	
Blank = Deluxe E = Economy	03 = -14.7 to 15 psig (Deluxe only) 04 = -14.7 to 25 psig 05 = -14.7 to 50 psig 06 = -14.7 to 75 psig 07 = -14.7 to 100 psi 08 = -14.7 to 500 psi 10 = -14.7 to 1000 p 11 = -14.7 to 5000 p 12 = -14.7 to 10000	l I Ig Ig Ig Ig Ig Ig	I B = 1-5VDC (economy only) M = 4-20mA V = 0-10VDC (deluxe only) J = 0-5VDC (deluxe only)	

PG/PV/PGE/PVE

Gauge Pressure Sensors

Installer's Specifications

Electrical:		
Supply Voltage	10-28 VDC	
Output	Deluxe: 0-5/0-10 VDC (3-wire) or 4-20 mA (2-wire)	
-	Economy: 1-5 VDC (3 wire) or 4-20 mA (2-wire)	
Load Impedance	>100kΩ	
Standard Connection	Cable gland 24" (600mm) length	
Pressure Port	1/4"NPT Male	
Performance at 25°C (77°F):		
Accuracy *	Deluxe: ±0.25% BFSL **	
	Economy: ±0.50% BFSL **	
Media Compatibility	Fluids & gases compatible with 316L stainless steel	
Pressure Cycles	>100 million cycles	
Over Pressure	2x F.S. without change in calibration	
Burst Pressure	5x rated pressure or 20,000 PSI	
Environmental:		
Shock	100G, 11 msec, 1/2 sine	
Vibration	Deluxe: 20G peak, 20 to 2400 Hz	
	Economy: 10G peak, 20 to 2000 Hz	
EMI/RFI Protection	Deluxe: yes	
	Economy: no	
Rating	Deluxe: IP-66	
	Economy: IP-65	
Operating Temperature Range	-40° to 85°C (-40° to 185°F)	
Compensated Temperature Range	0° to 55°C (32° to 130°F)	
Total Error Band Over Temperature	<±1% of FS	
Humidity	0-95% RH, non-condensing	

^{*} Accuracy includes nonlinearity and hysteresis.


QUICK INSTALL

- 1. Insert probe into area to be measured.
- 2. Wire according to diagrams. See Wiring section.


^{**} BFSL = Best fit straight line

DIMENSIONS


WIRING

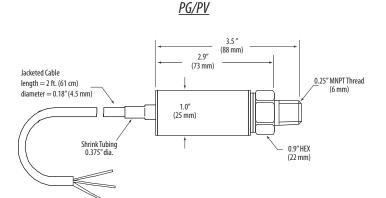

3-wire, 0-5VDC/0-10VDC



2-wire, 4-20mA



PGE/PVE

